

# Harwick Road, Yorkshire Road and Brockley Road


Irondequoit, New York

## PROJECT STATISTICS

**Client:**  
Town of Irondequoit

**Construction Cost:**  
\$1,860,000

**Completion Date:**  
December 4, 2004

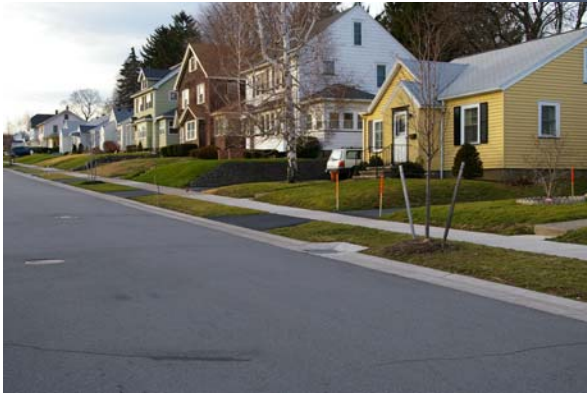

Passero Associates provided design and construction administration services for these Town of Irondequoit street improvement projects.

The Brockley Road project consisted of installation of a storm sewer, manholes and catch basins and replacement of the sanitary sewer including new manholes, house laterals, cleanouts and appurtenances. The existing pavement was reconstructed including driveway aprons, gutters, skip block sidewalk replacement, landscaping and other appurtenances.

Yorkshire Road consisted of installation of a storm sewer, manholes, catch basins and replacement of the sanitary sewer including new manholes, house laterals, cleanouts and appurtenances. The existing pavement was reconstructed including driveway aprons, gutters, full length sidewalk replacement, landscaping and other appurtenances.

Harwick Road consisted of installation of driveway aprons, catch basins, gutters, skip block sidewalk replacement, landscaping and other appurtenances. The existing pavement was milled and resurfaced.

## SERVICES PROVIDED

- Capital Improvement Plan
- Comprehensive Plans
- Construction Administration
- Construction Inspection
- Construction Layout/Stakeouts
- Contract Documents
- Cost Estimating
- Highway Design
- SEQRA Compliance
- Sewage & Drainage
- Topographic & Site Surveys

